

Cart & Dolly Reference Guide




The following features are standard on ALL Saw Trax Dollies:

- 12 Gauge Steel Body
- Powder Coated Steel Frame
- 16 Gauge Square Posts (if applicable)
- Units Range Up To 1000 lbs. Weight Capacity (if applicable)
- Adjustable Post Hole Positions (if applicable)
- All Carts Fit Through A Standard Door Opening (accessibility depends on load size)
- Standard E-Track Strap Slots Help To Secure Loads

SCOOP DOLLY (Base Size with Lip 30"L x 32"W x 5-1/4"H):	<i>SCOOP*</i>
Multi- Directional Manueverability, Zero Turning Radius	
Weight Capacity 800# Or Upgrade To 1000#	
Four 4" Polyurethane Over Cast Iron Casters (Base Model)	
Floor Clearance Is 5/8" For Exceptional Toe & Shoe Safety	
Adjustable Saddle Post Positions For Varied Size Loads	
4" Scoop Lip Plate For Easy Utilization With Varied Items	
Lift, Tilt, And Glide Through Narrow Aisleways (accessibility depends on load size)	
Unit With Optional Brakes Can Be Loaded And Braced So The Operator Can Step Away	

PANEL EXPRESS (Base Size 26"L x 20-3/4"W x 20"H):	<i>PE*</i>
Easily Move Sheet Material Panels With One Person	
Weight Capacity Up To 700# (200# Capacity In Locked Position)	
Self-Clamping Brace	
Front 5" Locking Casters	
Rear 12.25" Foam Filled Tires	
Floor Clearance Is 3-1/2" To Bottom Of Body	

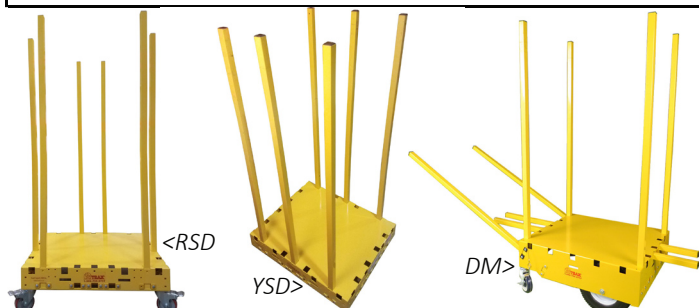

RAISED SAFETY DOLLY (Base Size 30"L x 25"W x 9-5/8"H):	<i>RSD*</i>
Floor Clearance Is 4-7/8"	
Six-56" Square 16-Gauge Repositionable Posts	
Multi-Directional Maneuverability, Zero Turning Radius	
Weight Capacity Up To 1000#	
Four 4" Polyurethane Over Cast Iron Casters (Base Model)	
Locking Casters For Staging Stability	
18 Post Positions Located On Top Of The Dolly Body (Vertical)	
14 Post Positions Located On Sides Of The Dolly Body (Horizontal)	

Yel-LOW SAFETY DOLLY (Base Size 30"L x 25"W x 5-1/4"H):	<i>YSD*</i>
Dolly Deck Height Is 5-1/4" (This is half an inch lower than a standard pallet)	
Six-56" Square 16-Gauge Repositionable Posts	
Multi-Directional Maneuverability, Zero Turning Radius	
Weight Capacity Up To 1000#	
Four 4" Polyurethane Over Cast Iron Casters (Base Model)	
Floor Clearance Is 5/8" For Exceptional Toe & Shoe Safety	
18 Post Positions Located On Top Of Dolly Body (Vertical)	
14 Post Positions Located On Sides Of Dolly Body (Horizontal)	

DOLLY MAX (Base Size 30"L x 25"W x 12-15/16"H):	<i>DM*</i>
Maneuverability In Multiple Environments	
Eight-56" Square 16-Gauge Repositionable Posts	
Weight Capacity 700# (Base Model)	
Front 5" Locking Casters	
Rear 12.25" Foam Filled Tires	
Easy To Push While Utilizing The Wheelbarrow Posts	
10 Post Positions Located On Top Of Dolly Body (Vertical)	
7 Post Positions Located On Sides Of The Dolly Body (Horizontal)	