

Dust Brush Installation - 1000 Series

Dust brush surrounds the saw blade and contains dust and debris when making cuts. Channels dust up into the dust hose to be collected into vacuum system.

Contents:


Qty 1 1.75" U shaped Dust Brush

Qty 1 Nut Driver

Qty 2 Self Drilling Screws

Installation:

1. Disconnect the power cord for the saw. Remove saw and spinning insert plate from carriage by releasing the two quick release pins at the top of the carriage.
1. Turn the saw over and identify the end of the blade guard where the blade is first exposed.
2. Position the U-shaped brush so that it surrounds the blade guard.
3. Attach the brush using the self-drilling screw. Screw through the tab on the brush into the shoe of the saw.

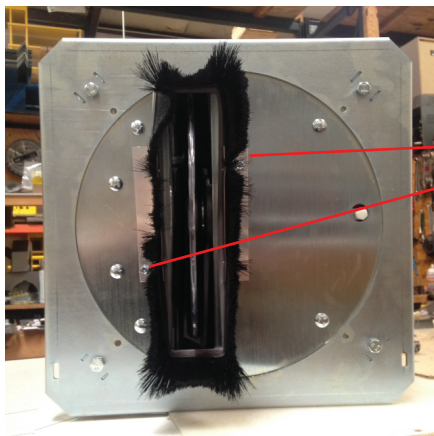

Self Tapping Screw (1 screw on each side of blade).

