


Vertical Panel Saws



**1000
Features**

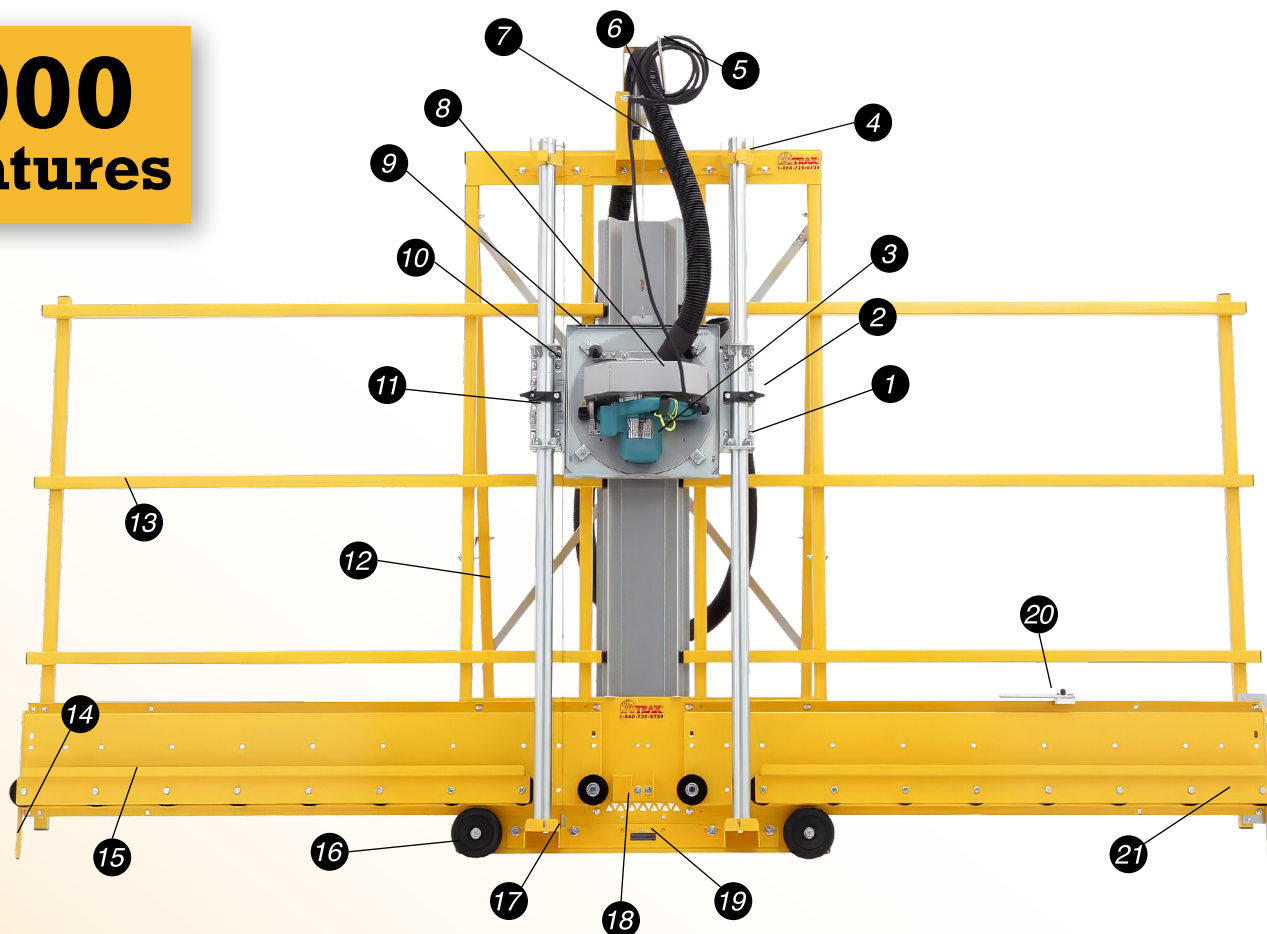

1. Accu-Glide Bearings: 12 sealed bearings for smooth, precise travel
2. Carriage Locks: secure the carriage for rip cuts/router use
3. Makita 5007F Saw: 15-amp; uses standard 7.25" blades; adjustable depth for scoring; blade lock for quick changes
4. Guide Tube Brackets: keep tubes parallel; replace one tube at a time
5. Cord Holder: keeps cord lifted and clear of the cutting path
6. Hose channel: keeps hose aligned on the spool and out of the way
7. Dust Hose: 2" diameter, 12' long; coupler plugs into select shop vacs
8. Metal Dust Hood: includes a lighted blade viewing port
9. Spinning Insert Plate: rotates quickly between crosscut and rip-cut positions
10. Rip Pointers: fast, simple rip-cut setup
11. Guide Tubes: 1/8" thick, nickel-plated
12. Folding Stand: front-folding ladder-style design for easy movement
13. Welded Steel Frame: powder-coated for durability
14. Side Stand Legs: keep the machine stable when set up
15. Fence Lip + Rollers: offset bend for 1 3/4" crosscuts; 18 rollers on full-size models; second roller height for cutting thin plastics
16. 5" Transport Wheels: easy machine movement; lift off ground when tilted back
17. Rip Gauge Spring: keeps tape straight and easy to read
18. Center Support: standard; supports material close to blade
19. Accu-Square System: one-time factory alignment; stays square for life
20. Stop Block with Bar: rides on fence lip; works on either side with strip bar
21. Accu-Fence Bracket: aligns fence ends; factory-installed with 10 lock nuts

Our **patented Accu-Square system** keeps the machine permanently square. Our **sealed-bearing Accu-Glide carriage** delivers smoother travel and tighter tolerances. **Compact models** use a 5' frame for space-restricted shops or portable use. **Full-Size models** use a 10' frame for maximum material support and easier rip-cutting.

Trusted by Shops, Warehouses & Fabricators Nationwide.

www.sawtrax.com | 770-974-0021 | 888-SAWTRAX

